


RF Wireless Touching LED RGB Controller

Features:

- Use RF signal for telecontroller, free and easy operation, no direction in 20 meters;
- Wide options of over 640,000 colors, adjust to your needs
- 8 grades brightness adjusting, to achieve real energy-saving ;
- With auto & manual color change mode
- Long life, lifespan up to 40000hours;
- Low energy consumption;
- No UV radiation, no stroboflash
- Accord with European Union CE, RoHS directive.

Dimensions:

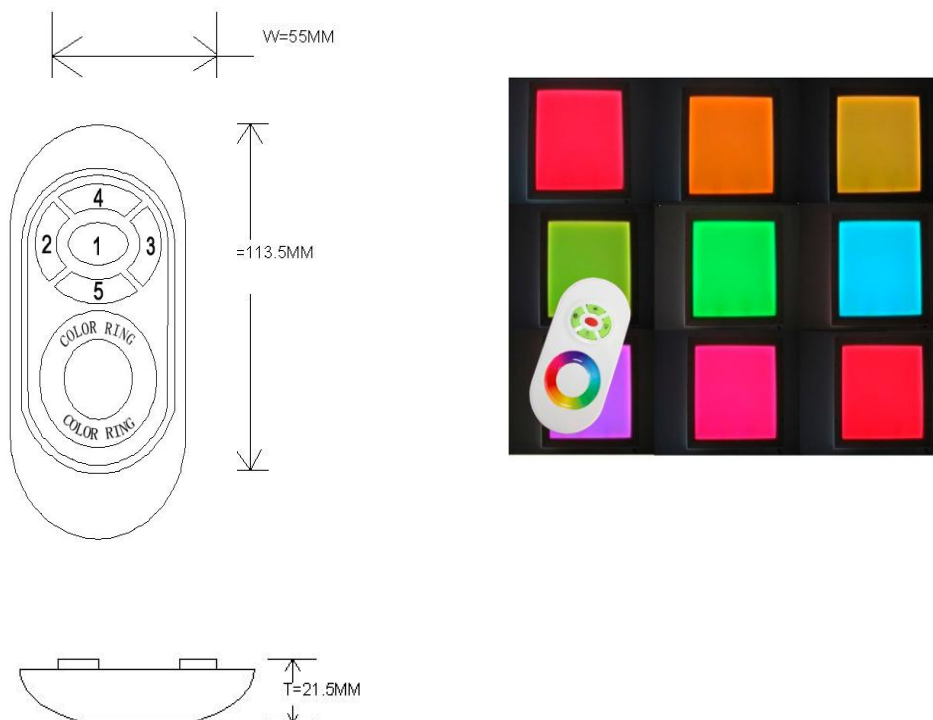

Specifications:

- Name: LED RGB Controllers
- Input Voltage: DC12V, DC24V (optional)
- Connection type: Common anode

● Radio frequency: 433.92MHz
● Receiver sensitivity: -105dbm
● Radio receive way: ASK
● Max STDBY current: 10mA
● Max load: 5A(each circuit)
● Control mode: PWM
● Control way: 3 ways , respectively corresponding R、 G、 B three colors
● Static power consumption: 30LED/M : ≤5.4W 60LED/M: ≤10.8W
● Static current: 30LED/M : 450mA 60LED/M: 900mA
● Working temperature: -20~80 degrees
● Material :Controller: aluminum remote: ABS+PC
● Life span: 50,000h
● Size:Remote:114×56×22mm Controller: 66×64×24mm
● Packing:4.5*8*12.5cm
● G.W.:0.16kgs/set
● Telecontrol distance: 20m
● Max no. of memory telecontroller: 6pcs

Functions of Keys

1. Key 1: on/off
2. Key 2: light changing mode(15 modes)
3. Key 3:color light/white light switching mode
4. Key 4: turn up(brightness/speed)
5. Key 5: turn down(brightness/speed)

How to use

1. Press Key 1 to turn on/off in any state.
2. Press Key 2 to activate light changing mode, a new mode each press,15 modes in total.
3. Press Key 3 once to activate white light mode, changing brightness by pressing Key 4/Key 5
Press Key 3 twice to activate color light mode, changing brightness by pressing Key 4/Key 5
or changing light color by touching the color ring.
4. Resume fuction. The previous settings will be resumed while power on again.
5. Matching code
Press Key 4 once within 3 seconds when power on again,the light will blink 3 times if matching
Clearing Code
Press Key 4 five times within 3 seconds when power on again,the light will blink 6 times if clearing

Feature chart for Key 2

1	Auto color changing	8 grades of brightness to adjust by pressing Key 4 or Key 5.			
2	three colors jumps to change	8 grades of speed to adjust by pressing Key 4 or Key 5	9	Green color jumps to change	8 grades of brightness to adjust by pressing Key 4 or Key 5.
3	seven colors jumps to change		10	Yellow color jumps to change	
4	three colors jumps to gradual change		11	Cyan color jumps to change	
5	seven colors jumps to gradual		12	white color jumps to change	
6	red color jumps to change		13	Red/blue light twinkles alternately	
7	Blue color jumps to change	14	Green/blue light twinkles alternately		
8	Purple color jumps to change	15	Red/green light twinkles alternately		

5.

ng is successful.

earing is successful.